

# HRV.95

ONE OF A NEW GENERATION  
OF HEAT RECOVERY SYSTEMS

QUIETER, MORE POWERFUL  
MORE EFFICIENT  
MORE CONTROLLABLE

APPENDIX Q ELIGIBLE  
PASSIVE HOUSE CERT  
ULTRA LOW SFP  
EC MOTORS

DESIGNED FOR USE WITH EARTH PIPE SYSTEMS



## Features with standard model:

- Automatic Summer By Pass
- Frost Protection

## Features with deluxe model:

- LCD Control Panel
- Automatic Summer By Pass
- Auto adjust for open chimney
- Frost Protection/Preheater
- Filter cleaning alarm
- CO<sub>2</sub> sensor \*
- RF Switch \*
- RH sensor \*
- Earth pipe control \*
- Comfort cooling with Artic unit \*

\* Optional



Control  
Panel



Fan speed setting  
Comfort temperature  
Balanced or supply fan off  
Timed boost facility



RF Switch



Starkey Systems UK Ltd  
Unit 3 Britannia Business Centre  
Britannia Way, Malvern  
Worcestershire, WR14 1GZ  
Tel: 01684 899 017, Fax: 01684 573 096  
info@centralvacuums.co.uk  
www.centralvacuums.co.uk

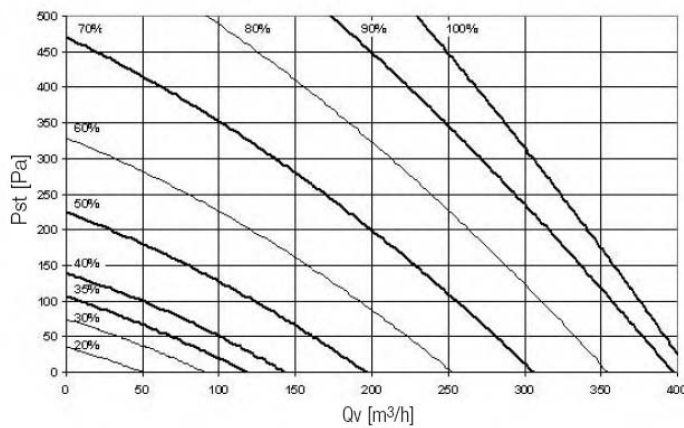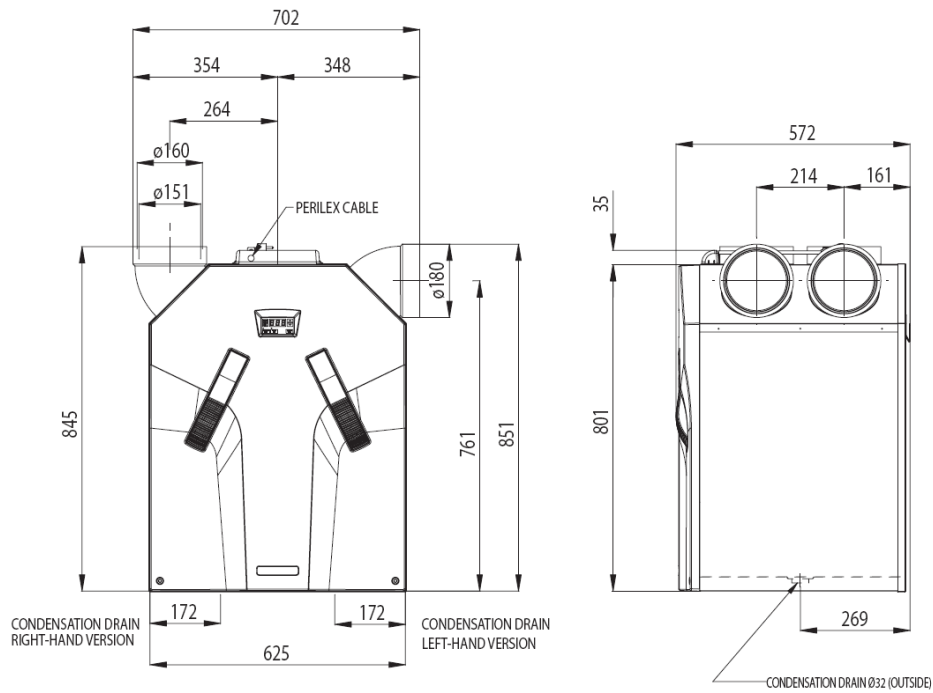

Setting	Ventilation Capacity	W
Low	100 m³/h at 45 Pa	16
Medium	150 m³/h at 105 Pa	42
High	225 m³/h at 195 Pa	106
Maximum	350 m³/h at 225	241

### Power Consumption

### Multiple airflow rate settings


HRV.95 Balanced Mechanical Supply and Extract System c/w Heat Recovery									
Fan Speed	Sound Power Levels, dB								Sound Pressure Level @3m dB(A)
	Octave Band Frequency, Hz							Over-all dB	
	125	250	500	1000	2000	4000	8000		
Max 100%	56.9	56.9	61.1	54.2	52.1	44.2	32.7	60.8	43.8
High 70%	52.3	53.6	54.7	47.3	44.1	35.3	25.6	54.1	37.1
Med 50%	46.1	49.5	45.4	38.6	34.2	23.7	22.7	46.2	29.2
Low 35%	38.5	40.9	36.3	28.3	21.3	17.4	22.3	36.7	19.7



Carbon Lite



Appendix Q Eligible



Passiv Haus Certified